

SYNTHESIS AND CHARACTERIZATION OF SrAl₄O₇ : LA PHOSPHOR PREPARED VIA SOL-GEL METHOD

V.T. JISHA

Research Centre, S.T. Hindu College, Nagercoil-629 002 (Tamilnadu), India

AND

SAJIKUMAR A.C.

Assistant Professor in Physics, M. C. College, Mariagiri-629153 (Tamilnadu), India

RECEIVED : 18 July, 2016

In this paper, monoclinic SrAl₄O₇ : La phosphor with 1 weight percentage of aluminium was synthesized by low temperature sol-gel method. Lanthanum doped strontium aluminate nanophosphor (SrAl₄O₇ : La) was prepared by sol-gel method. The obtained materials were characterized by SEM, XRD, EDAX and PL. Monoclinic structure was confirmed by X-ray diffraction analysis, particle size was determined by Scherrer formula. The particles were of somewhat round shaped and interlinked with each other, leading to the formation of bigger particle. Photoluminescence emission were at 395, 520 and 790 nm corresponding to UV, green and IR regions under excitation for 360 nm.

KEYWORDS : XRD, FTIR, SEM, sol-gel method, Photoluminescence.

INTRODUCTION

Alkaline earth metal oxides combined with aluminium oxide are of great interest in material science because of use as long duration photoluminescence and thermoluminescence pigments. They have potential use as refractory oxides in the steel industry and binder materials in the cement industry [1]. Many efforts have been made to discover host materials as well as activators with high performance for phosphor applications. Sol-gel method represents an attractive and easy alternative method to conventional synthesis method, such as ceramic firing [2–4], precipitation [5, 6], or ion exchange on supported oxides [7]. The sol-gel process is an efficient technique for the preparation of phosphors due to the good mixing of starting materials and relatively low reaction temperature resulting in more homogeneous products than those obtained by direct solid state reactions. With sol-gel technique, a low temperature (950°C) has been reported for the successful preparation of SrAl₄O₇ powders [8]. In this work, preparation of SrAl₄O₇ : La, structure, morphology and luminescence were reported. In recent years, rare earth (RE) doped nanomaterials has attracted wide use in various applications as thin film electroluminescent (TFEL) devices, optoelectronic or cathodoluminescent devices. RE-doped insulators are used in telecommunications, lasers and amplifiers, medical analysis and phosphors, etc. Generally rare earth doped aluminates have greater impact on defect centers within the band gap. The emission of light from the ultra violet, visible and Infra red depends on the host material properties [14-18].

EXPERIMENT

As the starting materials, strontium acetate $[(\text{CH}_3\text{COO})_2\text{Sr}\cdot 2\text{H}_2\text{O}]$ and aluminum acetate $[\text{C}_4\text{H}_6\text{AlO}_4\cdot 4\text{H}_2\text{O}]$ were used as the precursors. All starting materials were of the high purity. The procedure of synthesizing nanoparticles is thoroughly described as follows : 98 wt% of 2M Strontium acetate $[(\text{CH}_3\text{COO})_2\text{Sr}\cdot 2\text{H}_2\text{O}]$ was dissolved in 25 ml of 2-methoxyethanol with vigorous stirring. Simultaneously, 1 wt% of 2M Lanthanum nitrate $\text{La}(\text{NO}_3)_3\cdot 6\text{H}_2\text{O}$ was dissolved in 25 ml of 2-methoxyethanol with vigorous stirring. 1 wt% of 2 M Aluminum acetate $(\text{C}_4\text{H}_6\text{AlO}_4\cdot 4\text{H}_2\text{O})$ was dissolved in 25 ml of 2-methoxyethanol with vigorous stirring and subsequently, it was added to the first solution to reach 50 ml in total. Then it was stirred for 30 min at room temperature for the second time. Ammonia was slowly added to this solution with constant stirring until a pH of 10.5 was achieved. After stirring of the solution for 30 min, acetic acid and ethylene glycol in the ratio 1:1 was added to the solution. The sol was heated at 80 °C while being mechanically stirred with a magnetic stirrer. As the evaporation proceeded, the sol turned into a viscous gel. The gel was aged for 2h and then dried at 100 °C for about 5 h. The resulting materials were well grinded and annealed at 950°C for 2h to obtain SrAl_4O_7 : La nanopowders.

Characterizations such a X-ray diffraction (XRD) analysis, Fourier transform infra red (FTIR), scanning electron microscopy (SEM), energy dispersive spectroscopy (EDS) and photoluminescence emission spectra (PL) were studied and compared for the prepared samples. Conformation of pure SrAl_4O_7 was verified by XRD analysis. The morphology was examined by SEM analysis. The compositions of the products were determined by EDS. The photoluminescence properties were studied by Photoluminescence.

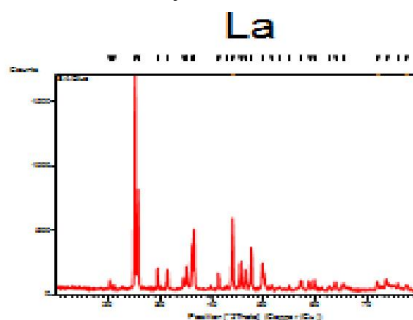


Fig. 1. XRD patterns of SrAl_4O_7 doped with lanthanum

RESULTS AND DISCUSSIONS

Figure 1 shows the X-ray powder diffraction patterns of SrAl_4O_7 doped with lanthanum. According to the JCPDS card no. 25-1289, the XRD patterns indicate that the crystal structure of SrAl_4O_7 is monoclinic. The particle size was estimated using the Debye Scherrer formula [9]:

$$D = K\lambda/\beta \cos \theta$$

where, D is the size of the particle, K = 0.99 is the size factor, β is the full width of half maximum, λ is the wavelength of X-ray radiation used and 2θ is the angle at which the

maximum intensity was observed. The particle size obtained is 77. The sharp peak indicates that nanoparticles are well crystallized.

Figure 2 shows the SEM images of SrAl_4O_7 doped with lanthanum. The surface morphology was in the form of granular structure with somewhat round shape and were interlinked with each other, leading to the formation of bigger particles. Also it was found that some irregular aggregations were formed in the image.

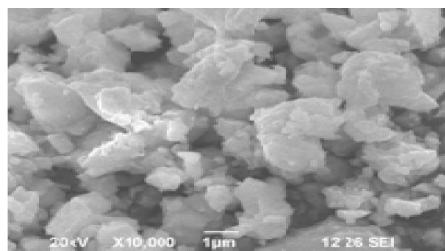


Fig. 2 SEM images of SrAl_4O_7 doped with lanthanum

Figure 3 shows the PL of SrAl_4O_7 doped with lanthanum. The PL under 360 nm excitation showed three peaks at 395 nm, 520 nm, and 790 nm corresponding to uv, green and IR region of spectrum, respectively. The strong peak showing blue emission at 395 nm was due to the exciton emission, and weak green emission at 520 nm was due to oxygen interstitial. The strong UV emission corresponds to the exciton recombination related near-band edge emission of nanoparticles. The green emissions are possibly due to surface defects in the nanoparticles. Lanthanide-doped strontium aluminate nanophosphors have the remarkable ability to combine two or more low energy photons to generate a single high-energy photon by an anti-Stokes process and hold great promise for a broad range of applications, ranging from high-resolution bioimaging to modern photovoltaic technologies. In contrast to conventional luminescent probes, lanthanide-doped aluminate nanophosphors exhibit excellent photostability, continuous emission capability, and sharp multi-peak line emission.

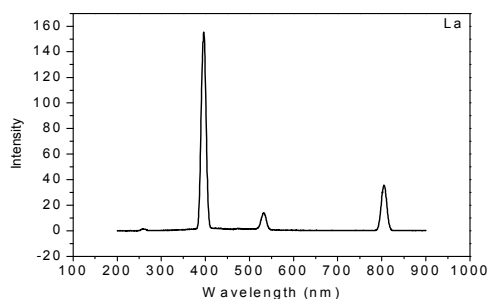


Fig. 3. PL graph of SrAl_4O_7 doped with lanthanum

CONCLUSION

In the present work, pure strontium aluminate nanophosphors with 1 weight percentage of lanthanum were prepared by sol-gel method and characterized by SEM, XRD, EDS, and PL. The XRD patterns revealed the monoclinic structure, and the size of the particle was found by using the Debye Scherrer relation. The surface structure of the samples was analyzed

by the SEM images. It showed that the particles were of somewhat round shape and were interlinked with each other, leading to the formation of bigger particles. Also it was found that some irregular aggregations were formed in the image. The peaks of EDS showed the composition of strontium, aluminium, lanthanum and oxygen. The PL under 360 nm excitation for showed three peaks at 395 nm, 520 nm, 790 nm corresponding to blue, green and IR region of spectrum respectively

REFERENCES

1. Pallila, F.C., Levine, A.K., Tomkus, M.R., *J. Electrochem Soc.*, **115**, 642–4p (1968).
2. Zou, W., Gonzalez, R.D., *Catal Lett.*, **12**, 73–86p (1995).
3. Bonivardi, L., Baltanas, M.A., *J. Catal.*, **125**, 243p (1990).
4. Viinegra, M., Gomez, R., *J. Catal.*, **111**, 439–44p (1998).
5. Kyylob, O.V., *Catalysis by Non Metals : Rules for catalytic selection*. New York: Academic; (1970).
6. Yao, N., Xiong, G., He, M., *et al.*, *Chem. Mater.*, **14**, 122–9p (2002).
7. Zou, W.Q., Gonawez, R.D., *J. Catal.*, **152**, 291–305p (1995).
8. Kurihara, L.K., Suib, S.L., *Chem. Mater.*, **5**, 609–13p (1993).
9. Cullity, B.D., *Elements of X-ray Diffraction*, 2nd Edn. New York: Addison Wesley (1978).
10. Dhak, D., Pramanik, P., *J. Am. Cer. Soc.*, **89**, 1014–21p (2006).
11. Deng, Z.X., Wang, C., Sun, X.M., *et al.*, *Inorg. Chem.*, **41**, 869–73p (2002).
12. Nakamoto, K., *Infrared Spectra of Inorganic and Coordination Compound*, 4th Edn. Beijing: Chemical Industry Press (1991).
13. Tanabe, S., Sugimoto, N., Ito, S., Hanada, T., *J. Luminesc.*, **87**, 670–672 (2000).
14. DeLoach, L.D., Payne, S.A., Chase, L.L., Smith, L.K., Kway, W.L., Krupke, W.F., *IEEE J. Quantum Electron*, **29**, 1179–1191 (1993).
15. Soukka, T., Kuningas, K., Rantanen, T., Haaslahti, V., Lovgren, T., *J. Fluoresc.*, **15**, 513–528 (2005).
16. Das, G.K., Yang-Tan, T.T., *J. Phys. Chem. C*, **112**, 11211–11217 (2008).
17. Xiao, Q., Si, Z., Yu, Z., Qiu, G., *Mater. Sci. Eng. B*, **137**, 189–194 (2007).
18. Ryu, H., Bartwal, K.S., *Journal of Alloys and Compounds*, **574**, 331–334 (2013).

